NWS PRINCIPAL USER PROCESSOR DISPOSAL PLAN

DOPPLER METEOROLOGICAL RADAR
WSR-88D

DoD Distribution Statement A - Approved for public release; distribution is unlimited.

PUBLISHED UNDER AUTHORITY OF THE SECRETARIES OF
COMMERCE, THE AIR FORCE, THE NAVY, AND TRANSPORTATION

Original Date: 15 October 2001
Revised on 20 August 2002

NWS APPROVAL:

_____ **Date** 10/5/01

John McNulty
Chief, Maintenace, Logistics,
and Acquisition Division

1. SUBJECT

National Weather Service (NWS) Principal User Processor (PUP) Disposal Plan.

2. PURPOSE

The purpose of this document is to provide guidance for disposing of the NWS Next Generation Weather Radar (NEXRAD) PUP equipment. PUPs serving as Supplementary PUPs, or those at River Forecast Centers (RFCs) may be removed from service upon approval by a Configuration Change Request (CCR), or a Request for Change (RC). RPGOP PUPs (56.6 kbps connection) may be removed from service after the AWIPS to NEXRAD LAN-to-LAN Interface is fielded and AWIPS meets the established criteria for PUP functionality. The Radar Operations Center (ROC) will generate an omnibus CCR to remove all RPGOP PUPs from service when this additional functionality is available.

For additional information concerning this document, contact the WSR-88D Hotline, Norman, Oklahoma; phone number: (800) 643-3363 or (405) 366-2980 or by e-mail at Hotline@noaa.gov. An electronic copy of this document can be found at the following internet address: www.osf.noaa.gov/ssb/sysdoc/techman/tmlinks.htm

3. SITES EFFECTED

See ATTACHMENT 2 for a complete effectivity.

4. DISPOSITION INSTRUCTIONS

This disposal plan defines the activities that must be accomplished by the NWS field offices and headquarters personnel to dispose of NEXRAD PUP equipment. In addition, this plan is in accordance with the requirements of WSOM Chapter A-74, Systems Decommissioning Policy. Your Servicing Property Officer is available for assistance and advice for disposing of items locally.

The NOAA Property Management Officer (PMO) has authorized the cannibalization of PUP equipment as necessary to meet the needs of the NWS as determined by the NWS ROC.

The PMO has also determined that the PUPs have no commercial value and that the estimated cost of their continued care and handling would exceed the estimated proceeds from their sale either as an item or as scrap.

Therefore, the NWS has authorized the disposal of all of the PUPs locally, whether cannibalized or not, through abandonment or destruction in accordance with the Federal Management Regulations, 41 CFR 102-36. Therefore, unless there are health, safety, or security reasons which prohibit it, public notice must be given of the intention to abandon or destroy the PUP at your location. This may be done by publishing a notice in a local newspaper, posting a sign in a public area, or posting a notice on a website. This notice must include an offer to sell and must be posted for no less than a period of one week.

If you become aware of an interest from an entity in purchasing the property, you must implement sales procedures in lieu of abandonment/destruction. This sale must be conducted as a spot bid sale in accordance with 41 CFR 101-45. Your servicing Property Officer will assist you in conducting this sale.

You may also donate the PUPs to a public body, that is, an instrumentality of a State or local government, any Indian tribe, or any agency of the Federal Government. If you become aware of an interest from an eligible non-profit organization that is not a public body, the donation must be handled through GSA in accordance with 41 CFR 101-44. Again, your servicing Property Officer will assist you.

If there are no opportunities for sale or donation, the PUP may be abandoned or destroyed in any manner not detrimental or dangerous to public health or safety.

In all cases, a CD-52 form must be completed to document the disposition of the PUP. The face of the form must indicate the Property Identification Number (barcode number) and the serial number of the PUP being disposed of as well as the date the PUP was taken out of service. The reverse must describe the action taken to dispose of the equipment in the Disposition of Property section and give the date of actual disposition, and must be signed and dated by the responsible official, usually the Property Custodian. Send the original of the CD-52 form to your servicing Property Officer and a copy to:

ATTN: Brian Mason
OFA-smtp, Headquarters Property Management Officer
1305 East West Hwy
Silver Spring, MD 20910-3282

All property will be properly disposed of in accordance with the NOAA GSA property regulations (41CFR101:41 to 48)

NRC will support PUP equipment until the last operational site component is disposed of.

The disposal of site components shall include the restoration of the site to a condition established by the lease agreement or negotiations with the authority for that site.

5. EQUIPMENT AFFECTED

The equipment list located in ATTACHMENT 1 shall be disposed of in accordance with instructions provided in paragraph 4.

The National Reconditioning Center (NRC) has determined that no PUP components are needed for refurbishing or restocking. If GSA authorizes Abandonment and Destruction for any remaining PUP components, they shall be recycled. Any residual Swingout Power Supply batteries, shall be disposed of in accordance with NOAA Environmental Compliance Program of 1994 (see paragraph 12.).

6. ON-SITE SPARES AFFECTED

The following on-site spares, listed in Table 1:, are to be disposed of locally in accordance with local procedures.

Table 1: On-Site Spares

ASN	NSN	PART NUMBER	ITEM NAME	NWS QTY
R400-21A3A5	5998-01-393-0424	35-941	PCB, DMI	1
R400-21A3A20	5998-01-358-4474	35-910	ASSEMBLY, PCB	1
R400-41A1A1	5998-01-292-1352	1213823-201	CONVERTER, (1C456C)	1
R400-41A13A2	5998-01-355-4129	512184-04	PCB, REFRESH MEMORY	1
R400-41A13A12	5998-01-362-0560	513686-01 REV B8	PCB, GRAPHICS	1
R400-41A15A1	7025-01-369-4726	27-199	TAPE DRIVE, 1/4 IN	1
R400-41PS1A3	6695-01-377-7803	09-227	CDS MASTER	1
R400-44A1	7025-01-380-1651	DT-130	MOUSE, DATA ENTRY	1
R400-5A1A1	5998-01-389-2612	1222346-203 or 224001	MODULE, VCI-V	1
R400-5A5A2	7025-01-387-3167	27-204	DISK DRIVE, 600MB	1
R400-5A12A13	5998-01-347-3559	35-732	PCB, SELCH	1
R400-5A12A18	5998-01-388-7617	1222346-202 or 202660	MODULE, VCI-C	1
TOTAL LINE ITEMS				12
TOTAL ITEMS				12

7. ON-SITE CONSUMABLES AFFECTED

The following on-site consumables, listed in Table 2:, are to be disposed of locally in accordance with local procedures. If possible, use the consumables to support other equipment located at your site.

Table 2: On-Site Consumables

ASN	NSN	PART NUMBER	ITEM NAME	QTY
017-F-40-21	5920-00-010-6652	AGC-3	FUSE, 3 AMP 250 V	5
017-F-40-39	5920-00-011-7142	F02A125V10A	FUSE, 10 AMP 125 V	5
017-F-5-11A	5920-00-227-6179	F02B250V1-1/2A	FUSE, 3AG 1.5AMP 250 V	5
017-F-5-31S	5920-00-238-3087	MDL-2	FUSE, 2.0 AMP 250 V, SLO-BLO	5
017-F-4-10	5920-00-280-8342	AGC1	FUSE, 1 AMP 250 V	5
017-F-4-5	5920-00-280-8344	F02A250V1/2A	FUSE, 3AG 0.5 AMP 250 V	5
017-F-40-7	5920-00-284-9220	MDL-1	FUSE, 1 AMP 250 V	5
017-F-4-30	5920-00-557-2647	AGC4	FUSE, 3AG 4 AMP 250 V	5
017-F-7-40S	5920-00-880-0603	AGX-2	FUSE, 2 AMP 250 V	5
017-F-40-25	5920-01-017-0683	GMA-3	FUSE, 3 AMP 250 V	5
017-F-40-17	5920-01-093-8458	F02A250V2-1-2A	FUSE, 3AG 2.5 AMP 250 V	5
017-F-40-45	5920-01-123-5836	SC15 or 24-071	FUSE, 15 AMP 300 V	5
R400-21A9A3D1	7045-01-368-1667	LM510	DISK, OPTICAL	3
R400-47C01	7035-01-348-1257	016-1058-01	CLEANER, HD, COLOR PRNTR	1
R400-5A5A1C02	7035-01-373-5972	102791-12	KIT, HD CLEANING, 1/4 INCH DRV	1
R400-5A5A1C01	7045-01-193-4991	DC600A	TAPE, CARTRIDGE, MAGNETIC	10
R400-47C02	7510-01-295-9274	016-0898-00	TRANSFER ROLL (FILM)	5
R400-47C03	7530-01-295-4885	016-0895-00	TRANSPARENCIES, 8-1/2 X 11	1
R400-47C04	7530-01-295-4886	016-0981-00	PAPER, 8-1/2 X 11 COLOR PRINT	1
R400-47C05	9150-01-386-9285	006-2037-00	LUBE, PRINTER	1

8. SUPPORT EQUIPMENT AFFECTED

The following support equipment, listed in Table 3:, shall be kept on-site to support the RPG, ORPG and RDA. If the test equipment listed below is not needed after the removal of the PUP, return it to the NRC for restock.

Table 3: Support Equipment

SERD	ASN	NSN	PART NUMBER	ITEM NAME
11, 39	T372	6625-01-327-3306	2236A-02	@ OSCILLOSCOPE
11, 39	T373	6625-01-371-5069	2235A	@ OSCILLOSCOPE
12, 65	T333	6625-01-312-2930	87	@ MULTIMETER, HAND HELD
12	T329	6625-01-157-2246	8060A	@ MULTIMETER, HAND HELD
15	T335	6625-01-304-4945	AM-48	TRANSMISSION LINE TEST SET
19	T332	6625-01-336-6150	DT-5	TEST SET, TRANSMISSION
21	017-T-7	6625-00-286-4302	923700	DIP CLIP 16 PIN
95	R400-SE42	5120-01-449-7588	NWS-6000-SP1	TOOL KIT, EXTRACTION/ INSERTION

@ Alternate items for the same SERD

9. TECHNICAL MANUALS AND TRAINING MATERIAL AFFECTED

The following technical manuals and training material, with all applicable changes and supplements, will be disposed of in accordance with local procedures.

Table 4: Technical Manuals

NWS Number	DoD Number	Title	Date
EHB 6-530	TO 31P1-4-108-182	Maintenance Instructions, Principal User Processor (PUP) Group	15 January 1998
EHB 6-531	TO 31P1-4-108-61	Operations Instructions, Principal User Processor (PUP) Group	1 October 1996
EHB 6-531-1	TO 31P1-4-108-78-1	User's Guide, Principal User Processor/Radar Project Generation Operational Position (PUP/ RPGOP)	15 October 1998
EHB 6-532	TO 31P1-4-108-138-1	Commercial Off The Shelf (COTS) Manual Tektronix Incorporated Model 4693DX Color Image Printer User Manual	15 April 1993
EHB 6-533 V1	TO 31P1-4-108-132-1	Commercial Off The Shelf (COTS) Manual Model 4693DX Color Image Printer, Part Number 4693D Field Service Manual, Print Image Information	15 April 1993

Table 4: Technical Manuals

NWS Number	DoD Number	Title	Date
EHB 6-533 V2	TO 31P1-4-108-132-2	Commercial Off The Shelf (COTS) Manual Model 4693DX Color Image Printer, Part Number 4693D Field Service Manual, Interface Information	15 April 1993
		PUP Operators Handbook Volume I	1 August 1998
		PUP Operators Handbook Volume II	1 August 1998
		PUP Operators Handbook Volume III	1 August 1998
		WSR-88D Handbook Adaptable Parameters Volume II, PUP	1 May 1997
		Job Sheets/Reference, A Guide for Operating a WSR-88D Principal User Processor (PUP) Workstation	October 1998

10. RESPONSIBLITY FOR FUNDING

Those sites not listed in paragraph 11. shall bear the expense of disposing the PUP per paragraph 4.

11. PROPERTY TO BE DISPOSED OF

The following sites, listed in Table 5: shipped their complete PUP cabinets, including the external power cables, to the NRC or to the ROC. These PUP cabinets were used to support the OPUP and ORPG program. The PUP Graphics Display table, monitor, CDT-100, and Graphics Tablet Overlay were disposed of in accordance with instructions in paragraph 4.

All other sites shall dispose of the complete PUP group, as shown in Figure 1, in accordance with instructions in paragraph 4.

The ROC generated and coordinated approval of a omnibus Configuration Change Request (CCR) to deactivate all remaining NWS PUPs. This CCR updates the Configuration Management baseline and databases to reflect de-activation of all NWS PUPS. Therefore, it is not necessary for NWS WFOs or Regional Officers to generate a Request for Change (RC) for the removal of a PUP from service.

Table 5: Site to Ship PUP Cabinets to NRC or ROC

PUP ID #	Serial #	SID	Site Name
43	AA26881-00	BCQ	NWS Central Region HQ
59	AA26874	KRF	Kansas City RFC
52	AA26884	EHU	NWS Southern Region HQ
3	B89-A0015	OST02	OSF-2 #04 PUP
36	B91-A0031	OST02	OSF-2 #06 PUP
27	B90-A0021	NFD	NATL MET Center #1
47	AA26883	NFD	NATL MET Center #2
251	AA29211801	JAN	Jackson, MS Sup 1
53	AA36886	WNA	Aviation Weather Center
337	AA36860001	ACR	Anchorage RFC
45	B90-A0022	TUA	Tulsa RFC
205	AA33567	ORN	Slidell RFC
338	AA45858902	AJK	Juneau WFO
264	AA352906	PTR	Portland RFC
169	AA33566401	FWR	Ft Worth RFC
183	AA35298301	RSA	Sacramento RFC
38	B92AA26879	HSXTA	Johnson Space Center
317	AA361890001	HFO	Honolulu #2
306	AA39120001	HFO	Honolulu #3
149	AA35284801	SJT	San Angelo SUP1

12. DISPOSAL ISSUES

The following parts, listed below in Table 6:, contain hazardous material and must be disposed of in accordance with local procedures:

Table 6: Hazardous Materials

Part Number	UD Number	Nomenclature	Hazard
513227-03, -04, -05	45A1	Monitor, Color (HM-4119) (4520, 4319)	Cadmium and Lead
27-211F01MXXRXX	43A1	Monitor, CDT-100	Cadmium and Lead

13. EQUIPMENT ACCOUNTABILITY

The ROC request all Dedicated and Dial Codex 3263 modems, part number-1219739-207 be shipped to the ROC:

Radar Operations Center
Attention: Randall White, Suite 101
3200 Marshall Ave
Norman, OK 73072

The ROC also needs a small quantity of dedicated and dial cables but these needs will be addressed on an ad-hoc basis.

NWS sites are to excess their PUPs and not transfer the accountable property to the NRC. NWS sites should use a CD Form 509 and CD Form 52 to remove the PUP from their local property inventory after following the procedures outlined in paragraph 4.

In addition, report the completed disposal as a deactivation on a WS Form A-26 according to the instructions in Engineering Handbook 4 (EHB-4), Engineering Management Reporting System (EMRS), Part 2 and Appendix G. Include the following information on the WS Form A-26:

a. An equipment code of **PUP** in block 7.
b. The appropriate serial number in block 8.
c. A Type Maintenance of **E** in block 9.
d. An Action Taken of **B** in block 10.

A sample WS Form A-26 is provided in ATTACHMENT 3.

14. POINTS OF CONTACT

NWS Eastern Regional Headquarters, SOD and EPM Chiefs
NWS Southern Regional Headquarters, SOD and EPM Chiefs
NWS Central Regional Headquarters, SOD and EPM Chiefs
NWS Western Regional Headquarters, SOD and EPM Chiefs
NWS Alaskan Regional Headquarters, SOD and EPM Chiefs
NWS Pacific Regional Headquarters, SOD and EPM Chiefs
Richard Winn, EASC
Gilly Elsca, CASC
Hank Kordek, MASC
Dave Hunsaker, WASC

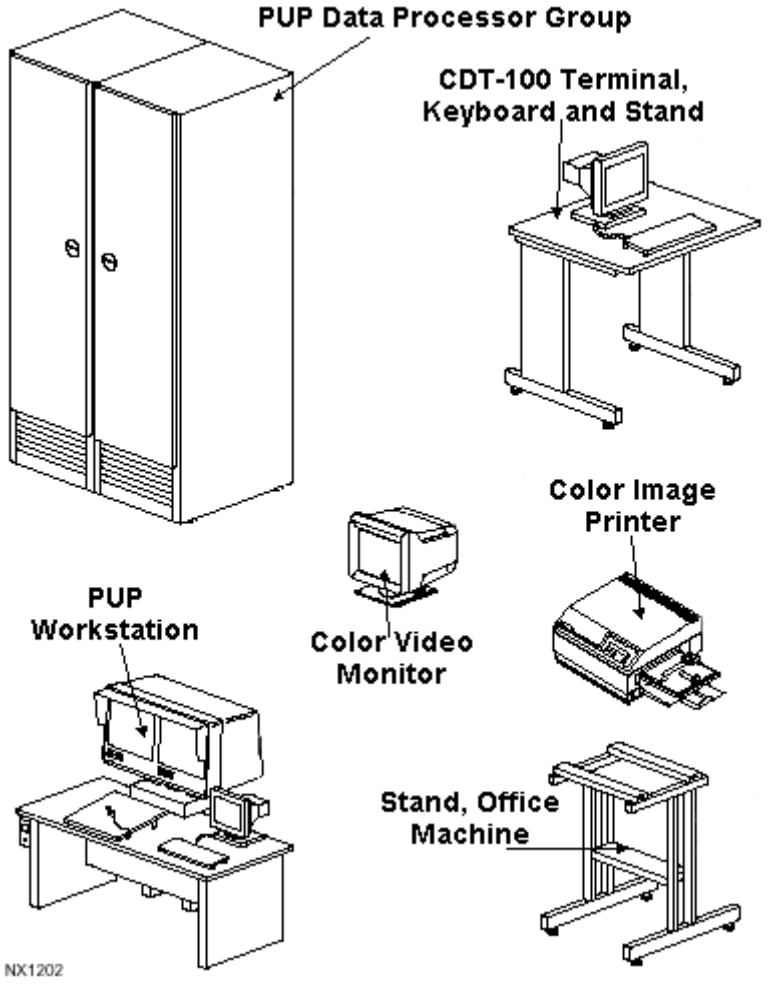

Figure 1 NEXRAD PUP Configuration

PUP DISPOSAL PLAN

ATTACHMENT 1

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	1214780-XXX	1	PRINCIPAL USER PROCESSOR GROUP	56232	REF	XC	A
	1219747-XXX	1	PRINCIPAL USER PROCESSOR GROUP	56232	REF	XC	B
	1221826-XXX	1	PRINCIPAL USER PROCESSOR GROUP	56232	REF	XC	C
41	1525326-XXX	2	PUP DATA PROCESSOR	56232	1	PDOOD	A
41	1219745-XXX	2	PUP DATA PROCESSOR	56232	1	PDOOD	B
41	1221825-XXX	2	PUP DATA PROCESSOR	56232	1	PDOOD	C
	17-854F00MXXRXX	2	CABLE, EXTERNAL/CRT, 25 FT	30331	1	PAOOO	
42	27-211F01MXXRXX	2	MONITOR, CDT100 (53073) (ALT PN 598-0012175)	30331	1	PAODD	
	239001 OR 239002	3	FUSE	75195	1	PAOZZ	
	27-212F01MXXRXX	3	KEYBOARD, CDT100 (53073) (ALT PN 598-0004322 (53073) (ALT PN 598-0012175)	30331	1	PAOZZ	
	1214782-201	2	STAND, TERMINAL	56232	1	XB	
	1213666-301	2	PUP WORKSTATION	56232	1	XC	A
	1213666-302	2	PUP WORKSTATION	56232	1	XC	B

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
47	4693DX	2	COLOR IMAGE PRINTER (56232)	80009	1	PAODD	
47-K1	47K1	2	REPAIR KIT	82187	1	PCOZZ	
50	HM-4119-D-DA	2	COLOR VIDEO MONITOR (56232)	2X758	1	PAODD	
	3000UP	2	STAND, OFFICE MACHINE (56232)	0H3W3	1	PAOZZ	
	M55339/17-00274	2	ADAPTER, CONNECTOR	81349	3	PAOZZ	A
	1219716-301	2	CABLE, GROUND	56232	1	PAOZZ	
	1219716-303	2	CABLE, GROUND	56232	1	PAOOO	
W215	1221870-301	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W215	1214757-312	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W215P1	M24308/4-2	3	CONNECTOR	81349	1	PAOZZ	A B
W215P2	M24308/2-3	3	CONNECTOR	81349	1	PAOZZ	A B
W301	1214807-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W301P1W301P2	M39012/16-0015	3	CONNECTOR	81349	1	PAOZZ	
W301	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W301P1W301P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W302	1214807-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
W302P1W302P2	M39012/16-0015	3	CONNECTOR	81349	1	PAOZZ	
W302	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W302P1W302P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	56232	2	PAOZZ	A B
W303	1214807-303	2	CABLE ASSEMBLY	56232	1	PAOOO	
W303P1 W303P2	M39012/16-0015	3	CONNECTOR	81349	1	PAOZZ	
W303	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W303P1 W303P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W304	1214807-304	2	CABLE ASSEMBLY	56232	1	PAOOO	
W304P1 W304P2	M39012/16-0015	3	CONNECTOR	81349	1	PAOZZ	
W304	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W304P1 W304P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W305	1214807-305	2	CABLE ASSEMBLY	56232	1	PAOOO	
W305P1 W305P2	M39012/16-0015	3	CONNECTOR	81349	1	PAOZZ	
W305	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W305P1 W305P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W306	1214807-306	2	CABLE ASSEMBLY	56232	1	PAOOO	
W306P1 W306P2	M39012/16-0015	3	CONNECTOR	81349	1	PAOZZ	
W306	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W306P1 W306P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W307	1214808-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W307P1	DAU-15SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
W307P2	DBU-25SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W307	1218818-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W307P1	M24308/2-2	3	CONNECTOR	81349	1	PAOZZ	
W307P2	M24308/2-3	3	CONNECTOR	81349	1	PAOZZ	
W309	1214808-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W309P1	DAU-15SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
W309P2	DBU-25SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
W309	1218818-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
W309P1	M24308/2-2	3	CONNECTOR	81349	1	PAOZZ	
W309P2	M24308/2-3	3	CONNECTOR	81349	1	PAOZZ	
W310	1214811-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W310	1218819-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W310P1	DBU-25PF0	3	CONNECTOR, PLUG, ELECTRICAL (56232)	71468	1	PAOZZ	
W310P2	157-32360	3	CONNECTOR, RECEPTACLE (56232)	02660	1	PAOZZ	
W313	1218201-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W313P1	MS3406D18-11S	3	CONNECTOR	96906	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W313P2	WC596/137-1	3	CONNECTOR	81348	1	PAOZZ	
W315	1214816-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W315	1218820-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W315P1	DEU-9PF0	3	CONNECTOR, D-SUB, PLUG (56232)	71468	1	PAOZZ	
W315P2	DBU-25PF0	3	CONNECTOR, PLUG, ELECTRICAL (56232)	71468	1	PAOZZ	
W316	1214817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W316	1218821-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W316P1 W316P2	DEU-9PF0	3	CONNECTOR, D-SUB, PLUG (56232)	71468	2	PAOZZ	
W323	1214818-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W323	1218823-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W323P1	M24308/2-5	3	CONNECTOR	81349	1	PAOZZ	
W323P1	DDU-50SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
W323P2	57-10500-14	3	CONNECTOR, ELECTRICAL, PLUG, 50 CONTACTS (56232)	02660	1	PAOZZ	
W323P2	157-72500-3	3	CONNECTOR, PLUG (56232)	02660	1	PAOZZ	
W324	1214819-301	2	CABLE ASSEMBLY	56232	1	PAOOO	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W324	1218823-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
W324P1	DDU-50SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
W324P2	157-72500-3	3	CONNECTOR, PLUG (38250) (ALT PN C88000206)(56232)	02660	1	PAOZZ	
W326	1224957-301	2	CABLE ASSEMBLY	56232	1	PAODD	C
W326P1	DCU-37PF0	3	CONNECTOR, ELECTRICAL, PLUG (56232)	71468	1	PAOZZ	C
	17-1657-37	3	BACKSHELL, RFI/EMI (38250) (ALT PN C88000206) (56232)	02660	1	PAOZZ	C
	030-1953-000	3	CONTACT, SOCKET, ELECTRICAL (56232)	71468	4	PAOZZ	C
W328	1214822-302	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W328	1218824-301	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W328	1218824-302	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W328	1214822-301	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W328P1 W328P2	DCU-37PF0	3	CONNECTOR, ELECTRICAL, PLUG (56232)	71468	2	PAOZZ	A B

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W330	1214826-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W330	1219650-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W330P1 W330P2	DBU-25PF0	3	CONNECTOR, PLUG, ELECTRICAL (56232)	71468	2	PAOZZ	
W347	1218725-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W347P1	WC596/14-2	3	CONNECTOR	81348	1	PAOZZ	
W347P2	WC596/13-3	3	CONNECTOR	81348	1	PAOZZ	
W348	1218817-319	2	CABLE ASSEMBLY	56232	1	PAOOO	
W348P1 W348P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W349	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W349P1 W349P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W350	1218817-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
W350P1 W350P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W351	1214807-310	2	CABLE ASSEMBLY	56232	1	XB	A B

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W351P1 W351P2	M39012/16-0015	3	CONNECTOR	81349	2	PAOZZ	A B
W351P1 W351P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	A B
W352	1214807-311	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W352P1 W352P2	M39012/16-0015	3	CONNECTOR	81349	2	PAOZZ	A B
W352P1 W352P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	A B
W353	1214807-312	2	CABLE ASSEMBLY	56232	1	PAOOO	A B
W353P1 W353P2	M39012/16-0015	3	CONNECTOR	81349	2	PAOZZ	A B
W353P1 W353P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	A B
W359	1218817-322	2	CABLE ASSEMBLY	56232	1	PAOOO	
W359P1 W359P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W360	1218817-323	2	CABLE ASSEMBLY	56232	1	PAOOO	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
W360P1 W360P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W361	1218817-324	2	CABLE ASSEMBLY	56232	1	PAOOO	
W361P1 W361P2	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	2	PAOZZ	
W365	1219726-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
W365	1219726-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
W365P1	DAU-15SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL	71468	1	PAOZZ	
W365P2	DAU-15PF0	3	CONNECTOR, ELECTRICAL, PLUG (56232)	71468	1	PAOZZ	
41PS3	PS004	2	POWER SUPPLY, 115/230 VAC (56232)	59951	1	PAOZZ	
41A1	RM004	2	RACK, CONVERTER ASSY (56232)	59951	1	PAOZZ	
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	8	PAOZZ	
	MS35338-138	2	WASHER	96906	8	PAOZZ	
	MS15795-808	2	WASHER	96906	8	PAOZZ	
			- - - - - - - - -				

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A1A3	100-1147-001	3	CARD RACK (56232)	59951	1	PAOZZ	
41A1W1	650-0073-001	3	CABLE, POWER SUPPLY INPUT (56232)	59951	1	PAOZZ	
41A1W2	100-0055-001	3	CABLE, CARD RACK INPUT (56232)	59951	1	PAOZZ	
41A1A1	IC456-C	3	CONVERTER (56232)	59951	1	PAOZZ	
41A1A2	ME101C	3	MODEM ELIMINATOR (56232)	59951	1	PAOZZ	
41A11	3010CSP-073	2	MODEM, HIGH SPEED (56232)	0PF60	1	PAODD	
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
	MS15795-808	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A2	80416/21201	2	9 SLOT BACKPLANE + RACK (WITH 26-PIN DTE CONN) (56232)	0BF49	1	PAODD	B
	58741	3	BACKPLANE (56232)	25420	1	PAODD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	80400/22368	2	9 SLOT BACKPLANE + RACK (WITH 25-PIN DTE CONN)	0BF49	1	PAODD	A
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	6	PAOZZ	
	MS35338-138	2	WASHER	96906	6	PAOZZ	
	MS15795-808	2	WASHER	96906	6	PAOZZ	
			- - - - - - - - -				
41A2PS1	80406	3	POWER SUPPLY (56232)	0BF49	1	PAODD	
41A1B1	80405	3	FAN MODULE (56232)	0BF49	1	PAODD	
41A2A1 THRU 41A2A3	21102	2	DATA MODEM, 14K, CARD NEST, SINGLE (0BF49) (ALT PN 40373)(56232)	0BF49	AR	PAOLD	
41A2A1 THRU 41A2A3	42703	2	DATA MODEM, 33K W/SDC, CARD NEST, SINGLE (56232) (1219739-210)	0BF49	AR	PAOLD	
41A2A4 41A2A5	21100	2	DATA MODEM, 14K, CARD NEST, DUAL (0BF49) (ALT PN 40372)(56232)	0BF49	AR	PAOLD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A2A4 41A2A5	42702	2	DATA MODEM, 33K W/SDC, CARD NEST, DUAL (56232)	0BF49	AR	PAOLD	
41A6	RJ45S-24-4	2	PANEL, ADAPTER, COMMUNICATIONS (56232) (1219734-201)	65752	2	PAOZZ	
			(ATTACHING PARTS)				
	MS51958-61	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
	MS15795-808	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A7	1222415-XXX	2	VME ASSEMBLY, PUP	56232	1	XC	
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
	MS15795-808	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A25	MF-RJ11-12-4	2	TELEPHONE PATCH PANEL (56232)	65752	1	PAOLD	
			(ATTACHING PARTS)				

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	MS51958-63	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A3	MF-RJ11-16-2	2	TELEPHONE PATCH PANEL (56232)	65752	1	PAOLD	
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
	MS15795-808	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A13	512384-07	2	GRAPHICS PROCESSOR ASSEMBLY	55257	1	PBODD	
	60-02075	2	FILTER, EMI (56232)	07700	2	PAOZZ	
41B1	028254	2	FAN, TUBEAXIAL, CIRCULAR FRAME (56232)	5Y921	4	PAOZZ	
			(ATTACHING PARTS)				
	MS51957-32	2	SCREW	96906	16	PAOZZ	
	MS35338-136	2	WASHER	96906	24	PAOZZ	
	MS15795-805	2	WASHER	96906	16	PAOZZ	
	MS35649-264	2	NUT	96906	16	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
			- - - - - - - - -				
41TB2 41TB3	37TB2F	2	TERMINAL BOARD	81349	2	PAOZZ	
			(ATTACHING PARTS)				
	MS51957-32	2	SCREW	96906	8	PAOZZ	
	MS35338-136	2	WASHER	96906	8	PAOZZ	
	MS15795-805	2	WASHER	96906	12	PAOZZ	
	MS35649-264	2	NUT	96906	8	PAOZZ	
			- - - - - - - - -				
41FL1	FA60-2016	2	FILTER, BANDPASS (13619) (ALT PN RF13125)(56232)	81831	1	PAOLD	
			(ATTACHING PARTS)				
	MS35650-304	2	NUT	96906	12	PAOZZ	
	MS35338-138	2	WASHER	96906	12	PAOZZ	
	MS15795-808	2	WASHER	96906	12	PAOZZ	
			- - - - - - - - -				
41FL1MS1	1213847-201	2	GASKET, SHIELDING, ELECTRONIC	56232	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
REFER TO							
41A4	RJ45S-16-2TP	2	PANEL, ADAPTER, COMMUNICATION (56232)	65752	1	PAOZZ	
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
	MS15795-808	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A27	28425	2	NEST RACK W/POWER SUPPLY (56232)	0BF49	1	PAODD	B
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	4	PAOZZ	B
	MS35338-138	2	WASHER	96906	4	PAOZZ	B
	MS15795-808	2	WASHER	96906	4	PAOZZ	B
			- - - - - - - - -				
41A27A1 THRU 41A27A3	28478	2	MODEM, LIMITED DISTANCE (56232)	0BF49	3	PAOLD	B
41A28	1042E+T	2	EXTENDER, PARALLEL LINE (56232)	0NYK1	1	PAOZZ	B

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
			(ATTACHING PARTS)				
	MS51957-30	2	SCREW	96906	2	PAOZZ	B
	MS35338-136	2	WASHER	96906	2	PAOZZ	B
	MS15795-805	2	WASHER	96906	2	PAOZZ	B
			- - - - - - - - -				
41A28PS1	AD-091A	2	ADAPTER, PS 120V, 60HZ TO 9VDC (56232)	0NYK1	1	PAOZZ	B
	92-631F00MXXRXX	2	M5/E5 PROCESSOR ASSEMBLY, PUP, CONCURRENT EQUIPMENT PARTS KIT	30331	1	AO	A
	92-617F00MXXRXX	2	M5/ES PROCESSOR ASSEMBLY, PUP, CONCURRENT EQUIPMENT PARTS KIT	30331	1	AO	B
41A15	92-390F02MXXRXX	3	SCSI ENCLOSURE ASSEMBLY	30331	1	XC	
41A15A1	27-199F00MXXRXX	2	TAPE DRIVE, 1/4 IN.	30331	1	PAODD	
41A15A1MS3	93-ADLF00MXXRXX	2	COVER, FRONT PANEL	30331	1	PAOZZ	
41A15A2	27-204F00MXXRXX	2	DISK DRIVE, 600 MB	30331	1	PAOLD	
41A15A3	97-249F00MXXRXX	2	OPTICAL DISC DRIVE	30331	1	PAODD	
41A15A4	93-527F00MXXRXX	2	SCSI ENCLOSURE ASSEMBLY W/POWER SUPPLY	30331	1	PBOZZ	
41A15PS1	34-046F01MXXRXX	3	POWER SUPPLY, +12, +5V, SCSI (0KY32)	30331	1	PAOLD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A15PS1F2	217 3.17	3	FUSE, 250V, 3.15A	75915	1	PAOZZ	
41A15W3	17-873F00MXXRXX	3	CABLE, FRONT PANEL	30331	1	PAOZZ	
41A9DS1	17-928F00MXXRXX	3	CABLE, POWER, 5/12 VDC	30331	1	PAOZZ	
41A15MP21	14-847F00MXXRXX	2	COVER, SCSI	30331	1	PAOZZ	
41A16	96-617FXXMXXRXX	3	M5/ES CHASSIS ASSEMBLY, PUP	30331	1	PDDOD	
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	8	PAOZZ	
	MS35338-138	3	WASHER	96906	8	PAOZZ	
	MS15795-808	3	WASHER	96906	8	PAOZZ	
			- - - - - - - - -				
41A8	93-549F00MXXRXX	3	FAN PANEL ASSEMBLY, LOWER	30331	1	XB	
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	4	PAOZZ	
	MS35338-138	3	WASHER	96906	4	PAOZZ	
	MS15795-808	3	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A8A1	184-00016-00	4	FAN PAN (LOWER)	30331	1	PAODD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A8A1A1	35-881F00MXXRXX	5	FAN SENSOR BOARD	30331	1	PAODD	
41A8A1B1 THRU 41A8A1B4	36-049F00MXXRXX	5	FAN ASSEMBLY	30331	4	PAOZZ	
41A18	93-626F00MXXRXX	3	FAN PANEL ASSEMBLY	30331	1	PAOOO	B
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	2	PAOZZ	
	MS35338-138	3	WASHER	96906	2	PAOZZ	
	MS15795-808	3	WASHER	96906	2	PAOZZ	
	MS51957-31	3	SCREW	96906	2	PAOZZ	
	MS35338-136	3	WASHER	96906	2	PAOZZ	
	MS15795-805	3	WASHER	96906	2	PAOZZ	
			- - - - - - - - -				
41A18W1	95-579F00MXXRXX	4	CABLE, FAN POWER	30331	1	PAOZZ	
41A18B1 41A18B2	36-011F00MXXRXX	4	FAN, MUFFIN	30331	2	PAOZZ	
41PS1	93-AAYF00MXXRXX	3	SWINGOUT POWER SUBSYSTEM	30331	1	PAODD	
41PS1A1	93-ABJF00M00R00	2	AC POWER MODULE	30331	1	PAODD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41PS1A1CB4 THRU 41PS1A1CB7	36-038F03MXXRXX	3	CIRCUIT BREAKER	30331	4	PAOZZ	
41PS1A2	93-ABRF00M00R04	2	DC POWER SUPPLY	30331	1	PAOLD	
41PS1A3	09-227F00MXXRXX	2	CDS CONTROL MODULE	30331	1	PAOLD	
41PS1A4	93-ABMF00MXXRXX	2	FAN ASSEMBLY	30331	1	PAODD	
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	6	PAOZZ	
	MS35338-138	3	WASHER	96906	6	PAOZZ	
	MS15795-808	3	WASHER	96906	6	PAOZZ	
			- - - - - - - - -				
41A5	35-896F00MXXRXX	3	CIRCUIT CARD ASSEMBLY, CDS PATCH PANEL	30331	1	PAOLD	
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	3	PAOZZ	
	MS35338-138	3	WASHER	96906	3	PAOZZ	
	MS15795-808	3	WASHER	96906	3	PAOZZ	
			- - - - - - - - -				

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A20	09-144F01MXXRXX	3	POWER DISTRIBUTION PANEL	30331	1	PAODD	
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	4	PAOZZ	
	MS15795-808	3	WASHER	96906	4	PAOZZ	
	MS35338-138	3	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
41A20CB1/ CB2	36-022F01MXXRXX	4	CIRCUIT BREAKER, 30A	30331	1	PAOZZ	
			(ATTACHING PARTS)				
	16-237F02MXXRXX	4	SCREW, PHILLIPS, NO. 6-32 X 1/4 IN. LG.	30331	4	PAOZZ	
	16-328F02MXXRXX	4	WASHER, INT TOOTH NO.6	30331	4	PAOZZ	
			- - - - - - - - -				
41A20CB3	36-038F01MXXRXX	4	CIRCUIT BREAKER, 5A (74193) (ALT PN KD1-5)	30331	1	PAOZZ	
41A20F1 THRU 41A20F5	WF1814/01-005	4	FUSE, 15A, 300V	81348	5	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A20XF1 THRU 41A20XF5	HPF-EE	4	FUSEHOLDER	71400	5	PAOZZ	
41A20LF1	24-103F00MXXRXX	4	LINE FILTER	30331	1	PAOZZ	
			(ATTACHING PARTS)				
	16-237F02MXXRXX	4	SCREW, PHILLIPS, NO. 6-32 X 1/4 IN. LG	30331	3	PAOZZ	
	16-328F02MXXRXX	4	WASHER, INT TOOTH NO.6	30331	3	PAOZZ	
			- - - - - - - - -				
	26-249F00MXXRXX	4	PLUG, 30A	30331	1	PAOZZ	
41A20J6	26-064F00MXXRXX	4	RECEPTACLE, AC OUTLET	30331	1	PAOZZ	
41A20J1 THRU 41A20J3	26-347F01MXXRXX	4	RECEPTACLE, 3 WIRE, AC/DC, 125V, 15A	30331	3	PAOZZ	
41A20J4 THRU 41A20J6	WC596/168-1	4	RECEPTACLE, 3 WIRE, AC/DC, 250V, 15A	81348	2	PAOZZ	
41A21	14-127F00MXXRXX	3	CONVENIENCE PANEL	30331	1	XC	
			(ATTACHING PARTS)				
	MS51958-63	3	SCREW	96906	4	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	MS35338-138	3	WASHER	96906	4	PAOZZ	
	MS15795-808	3	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
	44-02633	3	GASKET, SHIELDING, ELECTRONIC (56232)	07700	1	PAOZZ	
41J19	1217822-301	2	POWER STRIP ASSEMBLY	56232	1	PAOZZ	
41J20	1218755-301	2	POWER STRIP ASSEMBLY	56232	1	PAOZZ	
			(ATTACHING PARTS)				
	MS51958-63	2	SCREW	96906	2	PAOZZ	
	MS35338-138	2	WASHER	96906	2	PAOZZ	
	MS15795-808	2	WASHER	96906	2	PAOZZ	
	MS35650-304	2	NUT	96906	2	PAOZZ	
			- - - - - - - - -				
41MS3	1217074-315	2	GROUND STRAP	56232	1	PAOZZ	
	17-852F02MXXRXX	2	CABLE ASSEMBLY	30331	3	PAOZZ	
	95-579F00MXXRXX	2	CABLE, FAN POWER	30331	1	PAOZZ	
	95-791F00MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	17-783F00MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	17-783F00MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	95-579F00MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	17-688F01MXXRXX	2	CABLE, DUAL COAXIAL	30331	1	PAOZZ	
	17-704F01MXXRXX	2	CABLE, FAN POWER	30331	1	PAOOO	
	350779-1	3	CONNECTOR	00779	2	PAOZZ	
	17-705F00MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	17-706F05MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	17-709F02MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	375-06026-00	2	CABLE ASSEMBLY	30331	1	PAOZZ	
	95-636F00MXXRXX	2	CABLE ASSEMBLY	30331	2	PAOOO	
	747306-3	3	CONNECTOR (30331)	00779	1	PAOZZ	
	747303-3	3	CONNECTOR (30331)	00779	1	PAOZZ	
	17-989F07MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
41W145	95-628F02MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOOO	
41W145P1	26-351F02MXXRXX	3	CONNECTOR, PLUG	30331	4	PAOZZ	
	17-835F00MXXRXX	2	CABLE ASSEMBLY	30331	1	PAOZZ	
41W1	1214751-301	2	CABLE ASSEMBLY	56232	1	PAODD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41W1P1	DCU-37PF0	3	CONNECTOR, ELECTRICAL, PLUG (56232)	71468	1	PAOZZ	
41W1J15	DCU-37SF0	3	CONNECTOR, D-SUB, RECEPTACLE (56232)	71468	1	PAOZZ	
41W2	1214745-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W2P1	157-82500-3	3	CONNECTOR, RECEPTACLE, (56232)	02660	1	PAOZZ	
41W2J16	DDU-50PF0	3	CONNECTOR, PLUG, ELECTRONIC (56232)	71468	1	PAOZZ	
41W3	1214745-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W3P1	157-82500-3	3	CONNECTOR, RECEPTACLE, (56232)	02660	1	PAOZZ	
41W3J17	DDU-50PF0	3	CONNECTOR, PLUG ELECTRONIC (56232)	71468	1	PAOZZ	
41W4	1214651-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W4P1	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	1	PAOZZ	
41W4J4	31-343-1002	3	CONNECTOR, BNC BULKHEAD (56232)	74868	1	PAOZZ	
41W5	1214651-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W5P1	68175-1011	3	CONNECTOR, PLUG, BNC (56232)	74868	1	PAOZZ	
41W5J5	31-343-1002	3	CONNECTOR, BNC BULKHEAD (56232)	74868	1	PAOZZ	
41W6	1214651-303	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W6P1	68175-1011	3	CONNECTOR, PLUG (56232)	74868	1	PAOZZ	
41W6P2	31-343-1002	3	CONNECTOR, BNC BULKHEAD (56232)	74868	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41W7	1214651-304	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W7P1	68175-1011	3	CONNECTOR, PLUG (56232)	74868	1	PAOZZ	
41W7P2	31-343-1002	3	CONNECTOR, BNC BULKHEAD (56232)	74868	1	PAOZZ	
41W8	1214651-305	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W8P1	68175-1011	3	CONNECTOR, PLUG (56232)	74868	1	PAOZZ	
41W8P2	31-343-1002	3	CONNECTOR, BNC BULKHEAD (56232)	74868	1	PAOZZ	
41W9	1214651-306	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W9P1	68175-1011	3	CONNECTOR, PLUG (56232)	74868	1	PAOZZ	
41W9P2	31-343-1002	3	CONNECTOR, BNC BULKHEAD (56232)	74868	1	PAOZZ	
41W10	1214652-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W10P1	DBU-25PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
41W10P2	DBU-25SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-25	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000203)(56232)	02660	1	PAOZZ	
	C88124040	3	BACKSHELL, D-SUB, RFI/EMI (56232)	38250	1	PAOZZ	
41W11	1214653-301	2	CABLE ASSEMBLY	56232	1	PAOOO	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41W11P1	DEU-9PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
41W11P2	DEU-9SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-09	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000218)(56232)	02660	1	PAOZZ	
	C88104040	3	BACKSHELL, D-SUB, RFI/EMI (56232)	38250	1	PAOZZ	
41W12	1214658-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W12P1	DEU-9SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
41W12P2	3-87456-6	3	CONNECTOR	02660	1	PAOZZ	
	C88104040	3	BACKSHELL, D-SUB, RFI/EMI (56232)	38250	1	PAOZZ	
41W15	1214656-XXX	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W15P1	65057-007	3	CONNECTOR (56232)	22526	1	PAOZZ	
41W15P2	DDU-50PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-50	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000218)(56232)	02660	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	47712	3	CONTACT, SOCKET, CRIMP REMOVABLE (56232)	22526	50	PAOZZ	
41W26	1214654-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W26P1 41W26P2	DCU-37PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	2	PAOZZ	
	17-1657-37	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000206)(56232)	02660	2	PAOZZ	
41W29 41W29	1214745-301 1214745-302	2 2	CABLE ASSEMBLY CABLE ASSEMBLY	56232 56232	1 1	PAOOO PAOOO	
41W29P1	157-82500-3	3	CONNECTOR, TELCO (56232)	02660	1	PAOZZ	
41W29P2	DDU-50PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	C88144040	3	BACKSHELL, D-SUB, RFI/EMI (56232)	38250	1	PAOZZ	
41W29	1214745-303	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W29P1	157-12500-14(441)	3	CONNECTOR, TELCO (56232)	02660	1	PAOZZ	
41W29P2	157-72500-3	3	CONNECTOR, TELCO (56232)	02660	1	PAOZZ	
	157-1869-501	3	HOOD KIT, EMI SHIELD (56232)	02660	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41W29	1214745-304 1214745-305 1214745-306 1214745-307	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W29P1 41W29P2	157-72500-3	3	CONNECTOR, TELCO (56232)	02660	2	PAOZZ	
41W34	1214849-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W34P1	DEU-9PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-09	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000218) (56232)	02660	1	PAOZZ	
41W34J18	DBU-25SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	C88124040	3	BACKSHELL, D-SUB, RFI/EMI (56232)	38250	1	PAOZZ	
41W35	1214880-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W36	1213830-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
	428056	3	CORD ASSEMBLY, ELECTRICAL, POWER (56232)	5Y921	1	PAOZZ	
	MS25036-106	3	TERMINAL LUG	96906	2	PAOZZ	
41W37	1213830-302	2	CABLE ASSEMBLY	56232	1	PAOOO	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	428056	3	CORD ASSEMBLY, ELECTRICAL, POWER (56232)	5Y921	1	PAOZZ	
	MS25036-106	3	TERMINAL LUG	96906	2	PAOZZ	
41W38	1213830-303	2	CABLE ASSEMBLY	56232	1	PAOOO	
	428056	3	CORD ASSEMBLY, ELECTRICAL, POWER (56232)	5Y921	1	PAOOO	
	MS25036-106	3	TERMINAL LUG	96906	2	PAOZZ	
41W39	1213830-304	2	CABLE ASSEMBLY	56232	1	PAOOO	
	428056	3	CORD ASSEMBLY, ELECTRICAL, POWER (56232)	5Y921	1	PAOOO	
	MS25036-106	3	TERMINAL LUG	96906	2	PAOZZ	
41W61	1219730-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W61P1	DAU-15SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-15	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000207) (56232)	02660	1	PAOZZ	
41W61P2	DBU-25PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
	17-1657-25	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000203) (56232)	02660	1	PAOZZ	
41W62	1219729-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W62P1	DEU-9PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-09	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000218)(56232)	02660	1	PAOZZ	
41W62P2	DBU-25PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-25	3	BACKSHELL, D-SUB, RFI/EMI (38250) ALT PN C88000203) (56232)	02660	1	PAOZZ	
41W64	1219728-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W64P1	157-32500	3	CONNECTOR (56232)	02660	1	PAOZZ	
41W64J14	DAU-15PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	C88611000	3	BACKSHELL, RFI/EMI (56232) (1218770-201)	38250	1	PAOZZ	
41W65	1219731-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W65P1	DBU-25PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41W65P2	DBU-25SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-25	3	BACKSHELL, D-SUB, RFI-EMI (38250) (ALT PN C88000203) (56232)	02660	1	PAOZZ	
41W66	1214652-302	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W10P1	DBU-25PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
41W10P2	DBU-25SF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	1	PAOZZ	
	17-1657-25	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000203)(56232)	02660	1	PAOZZ	
	C88124040	3	BACKSHELL, D-SUB, RFI/EMI (56232)	38250	1	PAOZZ	
41W74	55729-06	2	CABLE ASSEMBLY	25420	1	PAOOO	
41W75	55729-06	2	CABLE ASSEMBLY	25420	1	PAOOO	
41W98 THRU 41W100	26975	2	CABLE ASSEMBLY (56232)	0BF49	1	PAOZZ	B
41W107 THRU 41W115	26975	2	CABLE ASSEMBLY (56232)	0BF49	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41W121	55729-06	2	CABLE ASSEMBLY	25420	1	PAOOO	
41W122	55729-06	2	CABLE ASSEMBLY	25420	1	PAOOO	
41W126	1222325-301	2	CABLE ASSEMBLY	56232	1	PAOOO	
41W126P1 41W126P2	DCU-37PF0	3	CONNECTOR, RECEPTACLE, ELECTRICAL (56232)	71468	2	PAOZZ	
	17-1657-37	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000206) (56232)	02660	2	PAOZZ	
	1214794-301	2	WIRING HARNESS	56232	1	PAOOO	
	1217081-302	2	HARNESS ASSEMBLY, BLOWER GROUNDING	56232	1	XB	
	1217081-303	2	HARNESS ASSEMBLY, BLOWER GROUNDING	56232	1	XB	
41Z1	26-40755	2	CABINET, ELECTRICAL EQUIPMENT (56232)	19178	1	XB	
41Z1MP1	1030-20220-1026	3	RFI, SHIELDING, DOOR (Order shielding per foot)	0R2V9	AR	PCOZZ	
	320226	2	CABLE ASSEMBLY, INTERCONNECTING, VCI-V TO VCI-C (56232)	65994	1	PAOOO	
41W31	1213893-303	2	CABLE ASSEMBLY	56232	1	PAOOO	A
	COHP-150	2	ARRESTER, ELECTRICAL SURGE PROTECTOR (56232)	0HHK2	6	PAOZZ	
41MP4	S1006-20	2	FILTER, ELEMENT, AIR	03522	2	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A7A1	224001	2	MODULE, VCI-V (56232)	65994	1	PAOLD	
41A7A2 41A7A3	FV5310MG03	2	MODULE, NARROWBAND (56232)	56776	2	PAOLD	
41A7A2W1	1222423-302	2	CABLE ASSEMBLY, NARROW BAND INTERFACE	56232	2	PAOOO	
	3448-6964	3	CONNECTOR, IDC TYPE, FEMALE (56232)	53387	1	PAOZZ	
	745530-3	3	CONNECTOR (56232)	00779	4	PAOZZ	
	M24308/26-1	3	CONNECTOR JACKSCREW	81349	16	PAOZZ	
41A7A4	12V-519-R09J12MP25	2	VME CHASSIS ASSEMBLY (56232)	76096	1	PAODD	
41A7B1 41A7B2	3610NL04WB40-D00	3	FAN ASSEMBLY, PUP VME CHASSIS (56232)	0D1M6	2	PAOZZ	
41A7PS1	MTC-353-0512FP	3	POWER SUPPLY, PUP VME CHASSIS	34337	1	PAOLD	
41A13A1	512390-01	2	PRINTED CIRCUIT BOARD ASSEMBLY, CURSOR	55257	1	PAOLD	
41A13A2 41A13A3 41A13A7 THRU 41A13A10	512184-04	2	PRINTED CIRCUIT BOARD ASSEMBLY, REFRESH MEMORY	55257	6	PAOLD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A13A4 41A13A5	512899-02	2	PRINTED CIRCUIT BOARD ASSEMBLY, 12A VIDEO	55257	2	PAOLD	
41A13A6	513608-01	2	PRINTED CIRCUIT BOARD ASSEMBLY, GRAPHICS ACCELERATE, PROCESSOR	55257	1	PAOLD	
41A13A11	513593-01	2	PRINTED CIRCUIT BOARD ASSEMBLY, BACKPLANE	55257	1	PAOLD	
41A13A12	513686-01 REV B8	2	PRINTED CIRCUIT BOARD, PROCESSOR	55257	1	PAOLD	
41A13A13	512426-03	2	PRINTED CIRCUIT BOARD ASSEMBLY, GPIF/ DMA	55257	1	PAOLD	
41A13A14	513616-01	2	PRINTED CIRCUIT BOARD ASSEMBLY, GRAPHICS ACCELERATE, INTERFACE	55257	1	PAOLD	
41A13A15	514276-01	2	PRINTED CIRCUIT BOARD ASSEMBLY, FRONT PANEL ASSEMBLY	55257	1	PAODD	
41A13CB1	2310062-01	2	CIRCUIT BREAKER (06402)	55257	1	PAOZZ	
41A13B1 THRU 41A13B3	0110020-01	2	FAN, 3.62 IN	55257	3	PAOZZ	
41A13B4 THRU 41A13B6	141LS-2282	2	FAN, 4.685 IN. (55257)	60856	3	PAOZZ	
41A13PS1	511533-05	2	POWER SUPPLY	55257	1	PAODD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A13PS2	514210-01	2	POWER SUPPLY, -2V, -5.2V	55257	1	PAODD	
41A13S1	1542.1121	2	SWITCH, ROCKER, 16A, 125/250 VAC, ON-OFF (55257)	7W718	1	PAOZZ	
41A13W7	511557-01	2	CABLE ASSEMBLY, POWER	55257	1	PAOZZ	
41W101	512015-04	2	CABLE ASSEMBLY, I/F RESET	55257	1	PAOZZ	
41A13W9	512376-01	2	CABLE ASSEMBLY	55257	2	PAOZZ	
41A13W26	513989-01	2	CABLE ASSEMBLY, FRONT PANEL	55257	1	PAOZZ	
41A13W4	511516-01	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W5	511517-01	2	CABLE ASSEMBLY, LINE FILTER	55257	1	PAOZZ	
41A13W6	511518-01	2	CABLE ASSEMBLY, TERMINAL BLOCK	55257	1	PAOZZ	
41A13W1	512378-01	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W10	512377-01	2	CABLE ASSEMBLY, TERMINAL BLOCK	55257	1	PAOZZ	
41A13W27	512446-02	2	CABLE ASSEMBLY, COAXIAL	55257	1	PAOZZ	
41A13W2	508673-04	2	CABLE ASSEMBLY, +5V, RED	55257	1	PAOZZ	
41A13W3	508677-03	2	CABLE ASSEMBLY, DC GND	55257	1	PAOZZ	
41A13W8	511560-02	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W11	512601-01	2	CABLE ASSEMBLY, POWER SUPPLY	55257	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A13W12	512602-01	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W23	513702-01	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W24	513836-01	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W22	513837-01	2	CABLE ASSEMBLY	55257	1	PAOZZ	
41A13W25	513618-01	2	CABLE ASSEMBLY	55257	3	PAOZZ	
41A13W13	511558-01	2	CABLE ASSEMBLY, LINE FILTER	55257	1	PAOZZ	
41A13LF1	6910079-01	2	FILTER, LINE, 10A, 125V	55257	1	PAOZZ	
	8603100-00	2	STRAIN RELIEF	55257	1	PAOZZ	
41A13A16	513703-01	2	FINAL ASSEMBLY, NEXRAD (LESS PCBS)	55257	1	PAODD	
41A16A3	93-ABSF00MXXRXX	2	TEMP SENSE ASSEMBLY, UPPER CHASSIS	30331	1	PAOLD	
41A16A4	35-AAMF00MXXRXX	2	MICRO 5 PROCESSOR ASSEMBLY	30331	1	PAOLD	
41A16A5	35-941F00M01RXX	2	CIRCUIT CARD ASSEMBLY, DIRECT MEMORY INTERFACE	30331	1	PAOLD	
41A16A6	35-ABIF07MXXRXX	2	CIRCUIT CARD ASSEMBLY, CMM, 8MB	30331	1	PAOLD	
41A16A17	96-162F01M00R13 OR 96-162F01M01R06	2	CIRCUIT CARD ASSEMBLY, OPTICAL DISK CONTROLLER	30331	1	PAOLD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A16A13 41A16A16 41A16A18	35-732F00MXXRXX	2	CIRCUIT CARD ASSEMBLY, SELECTOR CHANNEL	30331	3	PAOLD	
41A16A14A1	35-583F00MXXRXX	2	CIRCUIT CARD ASSEMBLY, DIGITAL I/O	30331	1	PAOLD	
41A16A15	513754-01	2	CIRCUIT CARD ASSEMBLY, GRAPHICS INTERFACE	55257	1	PAOLD	
41A16A19	202660	2	MODULE, VCI-C (56232)	65994	1	PAOLD	
41A16A20	35-910F01MXXRXX	2	CIRCUIT CARD ASSEMBLY, MULTIPERIPHERAL CONTROLLER W/IPL	30331	1	PAOLD	
41A16A21	35-955F01MXXRXX	2	CIRCUIT CARD ASSEMBLY, CLOCK DISTRIBUTION, S BUS	30331	1	PAOLD	
41A16AT1	35-886F00MXXRXX	2	CIRCUIT CARD ASSEMBLY, TERMINATOR, S BUS	30331	1	PAOLD	
41A16AT3 41A16AT4 41A16AT7 THRU 41A16AT10	35-813F01MXXRXX	2	CIRCUIT CARD ASSEMBLY, I/O TERMINATOR	30331	6	PAOZZ	
41A16AT5	35-814F01MXXRXX	2	CIRCUIT CARD ASSEMBLY, DMA TERMINATOR	30331	1	PAOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
41A16AT6	35-814F02MXXRXX	2	CIRCUIT CARD ASSEMBLY, DMA TERMINATOR	30331	1	PAOZZ	
41A16AT2	35-ADLF00MXXRXX	2	TERMINATOR BOARD	30331	1	PAOZZ	
	17-989F02MXXRXX	2	CABLE, TRANSMISSION, 40 FLAT	30331	1	PAOZZ	
43A1	27-211F01MXXRXX	2	MONITOR, CDT-100	30331	1	PAOLD	
	ME210	3	ADAPTER, NULL MODEM (0WY55)	59951	1	PAOZZ	
43A2	27-212F01MXXRXX	2	KEYBOARD, CDT-100 (53073)	30331	1	PAOZZ	
43MP1	1217758-203	3	MASK, KEYBOARD	56232	1	PAOZZ	
43A1W1	17-854F00MXXRXX	2	CABLE, EXTERNAL/CRT, 25 FT	30331	1	PAOOO	
44	DT4213-ST	2	CONTROL MODULE ASSEMBLY (DIGITIZING DATA TABLET) (PUCK NOT FURNISHED SEPARATELY, SUPPLIED WITH CONTROL MODULE ASSEMBLY) (56232)	62712	1	PAODD	
44A1	DT-130	3	MOUSE, DATA ENTRY	62712	1	PAOZZ	
44PS1	DT 920	3	POWER SUPPLY (56232)	62712	1	PAOZZ	
45	1213710-301	2	GRAPHICS DISPLAY ASSEMBLY	56232	1	XB	A

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
45	1213710-302	2	GRAPHICS DISPLAY ASSEMBLY	56232	1	XB	B
45P1	3920047-01	3	POWER CORD	55257	1	PAOZZ	
45A1 45A2	513227-03	3	MONITOR, COLOR (HM-4119)	55257	2	PAODD	
	513421-01	4	CABLE ASSEMBLY, VIDEO	55257	2	PAOZZ	
45A1A1 45A2A1	513433-01	4	BRIGHTNESS/CONTRAST CONTROL BOARD	55257	2	PAOLD	
45A1MP1 45A2MP1	RB-67-2A-SHANK-M	5	KNOB, BRIGHTNESS OR CONTRAST (55257)	86797	4	PAOZZ	
45A1A2 45A2A2	513503-02	4	CONTROL PANEL, FACEPLATE	55257	2	PAOZZ	
45A1S1 45A2S3	9060053-01	4	SWITCH, ON/OFF, ROCKER, DPDT, 16A 250 VAC	55257	2	PAOZZ	
45A1S2 45A2S4	9060054-01		SWITCH, DEGAUSS, ROCKER, SPST, MOMENTARY	55257	2	PAOZZ	
45A1 45A2	513227-04	3	MONITOR, COLOR (HM-4319)	55257	2	PAODD	
45A1A1 45A2A1	513433-02	4	BRIGHTNESS/CONTRAST CONTROL BOARD (0WY55) (ALT PN 2200088-201)	55257	2	PAOLD	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
45A1MP1 45A2MP1	RB-67-2A-SHANK-M	5	KNOB, BRIGHTNESS OR CONTRAST (55257)	86797	4	PAOZZ	
45A1A2 45A2A2	513503-02	4	CONTROL PANEL, FACEPLATE	55257	2	PAOZZ	
45A1S1 45A1S3	9060053-01	4	SWITCH, ON/OFF, ROCKER, DPDT, 16A 250 VAC	55257	2	PAOZZ	
45A1S2 45A2S4	9060054-01	4	SWITCH, DEGAUSS, ROCKER, SPST MOMENTARY	55257	2	PAOZZ	
45A1 45A2	513227-05	3	MONITOR, COLOR (HM-4520)	55257	2	PAODD	
45A1A1 45A2A1	514504-01	4	BRIGHTNESS/CONTRAST/ DEGAUSS CONTROL BOARD	55257	2	PAOLD	
45A1A2 45A2A2	514515-01	4	CONTROL PANEL, FACEPLATE	55257	2	PAOZZ	
45A1S1 45A1S3	9060053-01	4	SWITCH, ON/OFF, ROCKER, DPDT, 16A 250 VAC	55257	2	PAOZZ	
45P2	3920055-01	4	POWER CORD	55257	2	PAOZZ	
45MS3	3300-12	3	SLIDE, CHASSIS, 12 IN. (55257) (ALT PN 0310103-01)	16499	2	PAOZZ	
45MS4	370-12	3	GROMMET, RUBBER (55257)	05236	2	PCOZZ	

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
46	106463	2	AUDIBLE ALARM (56232)	16111	1	PAOLD	
			(ATTACHING PARTS)				
	MS51958-65	2	SCREW	96906	4	PAOZZ	
	MS35338-138	2	WASHER	96906	4	PAOZZ	
	MS15795-808	2	WASHER	96906	4	PAOZZ	
			- - - - - - - - -				
48 51	SP2085-RES911555	2	EQUALIZER/RGBS LINE DRIVER (56232)	0PDG4	2	PAOZZ	B
J1	1218758-101	2	POWER STRIP ASSEMBLY, MODIFIED	56232	1	PAOZZ	
J2	1218758-101	2	POWER STRIP ASSEMBLY, MODIFIED	56232	1	PAOZZ	B
			(ATTACHING PARTS)				
	MS51958-65	2	SCREW	96906	2	PAOZZ	
	MS35338-138	2	WASHER	96906	2	PAOZZ	
	MS15795-808	2	WASHER	96906	2	PAOZZ	
	MS35650-304	2	NUT	96906	2	PAOZZ	
			- - - - - - - - -				

ATTACHMENT 1 (Continued)

PARTS INDEX

REF DES	PART NUMBER	INDENT	DESCRIPTION	CAGE CODE	QTY PER ASSY	CODES	
						SMR	USABLE ON CODE
44MP2	2200013-201	2	TABLET, OVERLAY, GRAPHIC (USE WITH SOFTWARE BUILD 10.0)	0WY55	1	PAOZZ	
	510291-02	2	CABLE ASSEMBLY, COAXIAL, GREEN	55257	2	PAOZZ	
	510291-03	2	CABLE ASSEMBLY, COAXIAL, BLUE	55257	2	PAOZZ	
W356	1219727-301	2	CABLE ASSEMBLY	56232	1	PAOOO	B
W356P1 W356P2	DBU-25PF0	3	CONNECTOR, PLUG, ELECTRICAL (56232)	71468	2	PAOZZ	B
	M39029/64-369	3	CONTACT PIN	81349	15	PAOZZ	B
	17-1657-25	3	BACKSHELL, D-SUB, RFI/EMI (38250) (ALT PN C88000203) (56232)	02660	2	PAOZZ	B
45MP200	513610-01	2	TRIPLE SWIVEL ASSEMBLY	55257	1	PAOZZ	
45A3 THRU 45A5	28200	2	MODEM, LIMITED DISTANCE (56232)	0BF49	3	PAOLD	B
45S6	E79-30A	2	SWITCH, CHEAT, PUSHBUTTON (55257)	01963	1	PAOZZ	

USABLE ON CODES
A -LIMITED PRODUCTION
B -FULL SCALE PRODUCTION
C -FULL SCALE PRODUCTION WITH MICRO 5

PUP DISPOSAL PLAN

ATTACHMENT 2

EFFECTIVITY

NWS

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
	Eastern Region			
ALBANY RPGOP	ALBANY, NY	PUP	ALY	WN9518
BINGHAMTON RPGOP	BINGHAMTON, NY	PUP	BGM	WN9515
BOSTON RFC	TAUNTON, MA	PUP	TAR	WN9907
BOSTON RPGOP	TAUNTON, MA	PUP	BOX	WN9509
BROOKHAVEN RPGOP	UPTON, NY	PUP	OKX	WN9912
BUFFALO RPGOP	BUFFALO, NY	PUP	BUF	WN9528
BUFFALO SUP1	BUFFALO, NY	PUP	BUF	WN9528
BURLINGTON RPGOP	SOUTH BURLINGTON, VT	PUP	BTV	WN9617
BURLINGTON SUP1	SOUTH BURLINGTON, VT	PUP	BTV	WN9617
CARIBOU RPGOP	CARIBOU, ME	PUP	CAR	WN9712
CHARLESTON, SC RPGOP	CHARLESTON, SC	PUP	CHS	WN9208
CHARLESTON, WV RPGOP	CHARLESTON, WV	PUP	RLX	WN9414
CINCINNATI RFC	WILMINGTON, OH	PUP	TIR	WN9904
CINCINNATI RPGOP	WILMINGTON, OH	PUP	ILN	WN9710
CLEVELAND RPGOP	CLEVELAND, OH	PUP	CLE	WN9524

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
COLUMBIA RPGOP	WEST COLUMBIA, SC	PUP	CAE	WN9310
GREER RPGOP	GREER, SC	PUP	GSP	WN9312
MOREHEAD CITY RPGOP	NEWPORT, NC	PUP	MHX	WN9307
NATL CLIMATIC DATA CTR (NCDC)	ASHEVILLE, NC	PUP	NCCN7	WN9312
NORFOLK RPGOP	WAKEFIELD, VA	PUP	AKQ	WN9952
NORFOLK SUP1	WAKEFIELD, VA	PUP	AKQ	WN9952
NWS EASTERN REGION HQ	BOHEMIA, NY	PUP	VUY	WN4100
PHILADELPHIA RPGOP	MOUNT HOLLY, NJ	PUP	PHI	WN9950
PITTSBURGH RPGOP	CORAOPOLIS, PA	PUP	PBZ	WN9917
PORTLAND, ME RPGOP	GRAY, ME	PUP	GYX	WN9938
RALEIGH/DURHAM RPGOP	RALEIGH, NC	PUP	RAH	WN9306
ROANOKE RPGOP	BLACKSBURG, VA	PUP	RNK	WN9954
STATE COLLEGE RFC	STATE COLLEGE, PA	PUP	RHA	WN9932
STATE COLLEGE RPGOP	STATE COLLEGE, PA	PUP	CTP	WN9925
STERLING RPGOP	STERLING, VA	PUP	LWX	WN9931
WILMINGTON RPGOP	WILMINGTON, NC	PUP	ILM	WN9301
Southern Region				
ALBUQUERQUE RPGOP	ALBUQUERQUE, NM	PUP	ABQ	WP9365

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
ALBUQUERQUE SUP1	ALBUQUERQUE, NM	PUP	ABQ	WP9365
AMARILLO RPGOP	AMARILLO, TX	PUP	AMA	WP9363
ATLANTA RFC	PEACHTREE CITY, GA	PUP	ALR	WP9936
ATLANTA RPGOP	PEACHTREE CITY, GA	PUP	FFC	WP9219
ATLANTA SUP1	PEACHTREE CITY, GA	PUP	FFC	WP9219
AUSTIN/SAN ANTONIO #1	NEW BRAUNFELS, TX	PUP	EWX	WP9253
AUSTIN/SAN ANTONIO RPGOP	NEW BRAUNFELS, TX	PUP	EWX	WP9253
BIRMINGHAM RPGOP	ALABASTER, AL	PUP	BMX	WP9957
BIRMINGHAM SUP #1	ALABASTER, AL	PUP	BMX	WP9957
BROWNSVILLE RPGOP	BROWNSVILLE, TX	PUP	BRO	WP9250
CORPUS CHRISTI RPGOP	CORPUS CHRISTI, TX	PUP	CRP	WP9251
DALLAS/FT WORTH RPGOP	FORT WORTH, TX	PUP	FWD	WP9259
DALLAS/FT WORTH SUP1	FORT WORTH, TX	PUP	FWD	WP9259
EL PASO RPGOP	SANTA TERESA, NM	PUP	EPZ	WP9270
FT WORTH RFC	FORT WORTH, TX	PUP	FWR	WP9911
HOUSTON RPGOP	DICKINSON, TX	PUP	HGX	WP9935
JACKSON, MS RPGOP	JACKSON, MS	PUP	JAN	WP9235
JACKSONVILLE RPGOP	JACKSONVILLE, FL	PUP	JAX	WP9206
KEY WEST RPGOP	KEY WEST, FL	PUP	EYW	WP9201

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
KNOXVILLE RPGOP	MORRISTOWN, TN	PUP	MRX	WP9325
KNOXVILLE SUP #1	MORRISTOWN, TN	PUP	MRX	WP9325
LAKE CHARLES RPGOP	LAKE CHARLES, LA	PUP	LCH	WP9240
LAKE CHARLES SUP1	LAKE CHARLES, LA	PUP	LCH	WP9240
LITTLE ROCK RPGOP	NORTH LITTLE ROCK, AR	PUP	LZK	WP9340
LITTLE ROCK SUP1	NORTH LITTLE ROCK, AR	PUP	LZK	WP9340
LUBBOCK RPGOP	LUBBOCK, TX	PUP	LUB	WP9933
MELBOURNE RPGOP	MELBOURNE, FL	PUP	MLB	WP9204
MEMPHIS RPGOP	MEMPHIS, TN	PUP	MEG	WP9334
MEMPHIS SUP1	MEMPHIS, TN	PUP	MEG	WP9334
MIAMI SUP #1	MIAMI, FL	PUP	MFL	WP9918
MIAMI RPGOP	MIAMI, FL	PUP	MFL	WP9918
MIDLAND/ODESSA RPGOP	MIDLAND, TX	PUP	MAF	WP9265
MOBILE RPGOP	MOBILE, AL	PUP	MOB	WP9223
NASHVILLE RPGOP	OLD HICKORY, TN	PUP	OHX	WP9327
NORMAN RPGOP	NORMAN, OK	PUP	OUN	WP9921
NORMAN SUP1	NORMAN, OK	PUP	OUN	WP9921
NORTHEAST ALABAMA RPGOP	ALABASTER, AL	PUP	BMX	WP9957
SAN ANGELO RPGOP	SAN ANGELO, TX	PUP	SJT	WP9263

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
SAN ANGELO SUP1	SAN ANGELO, TX	PUP	SJT	WP9263
SAN JUAN	SAN JUAN, PR	PUP	SJU	WP9526
SHREVEPORT RPGOP	SHREVEPORT, LA	PUP	SHV	WP9248
SLIDELL RFC	SLIDELL, LA	PUP	ORN	WP9939
SLIDELL RPGOP	SLIDELL, LA	PUP	LIX	WP9919
TALLAHASSEE RPGOP	TALLAHASSEE, FL	PUP	TLH	WP9214
TALLAHASSEE SUP1	TALLAHASSEE, FL	PUP	TLH	WP9214
TAMPA RPGOP	RUSKIN, FL	PUP	TBW	WP9961
TULSA RFC	TULSA, OK	PUP	TUA	WP9928
TULSA RPGOP	TULSA, OK	PUP	TSA	WP9356
WESTERN ARKANSAS RPGOP	TULSA, OK	PUP	TSA	WP9356
Central Region				
ABERDEEN RPGOP	ABERDEEN, SD	PUP	ABR	WR9659
BISMARCK RPGOP	BISMARCK, ND	PUP	BIS	WR9764
BISMARCK SUP1	BISMARCK, ND	PUP	BIS	WR9764
CHEYENNE RPGOP	CHEYENNE, WY	PUP	CYS	WR9564
CHICAGO RPGOP	ROMEOVILLE, IL	PUP	LOT	WR9969
DENVER RPGOP	BOULDER, CO	PUP	BOU	WR9469

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
DES MOINES RPGOP	JOHNSTON, IA	PUP	DMX	WR9546
DETROIT RPGOP	WHITE LAKE, MI	PUP	DTX	WR9954
DODGE CITY RPGOP	DODGE CITY, KS	PUP	DDC	WR9451
DULUTH RPGOP	DULUTH, MN	PUP	DLH	WR9745
FARGO/GRAND FORKS RPGOP	GRAND FORKS, ND	PUP	FGF	WR9750
GOODLAND RPGOP	GOODLAND, KS	PUP	GLD	WR9465
GRAND ISLAND RPGOP	HASTINGS, NE	PUP	GID	WR9552
GRAND JUNCTION RPGOP	GRAND JUNCTION, CO	PUP	GJT	WR9476
GRAND RAPIDS RPGOP	GRAND RAPIDS, MI	PUP	GRR	WR9635
GREEN BAY RPGOP	GREEN BAY, WI	PUP	GRB	WR9645
INDIANAPOLIS RPGOP	INDIANAPOLIS, IN	PUP	IND	WR9438
JACKSON, KY RPGOP	JACKSON, KY	PUP	JKL	WR9956
LA CROSSE RPGOP	LA CROSSE, WI	PUP	ARX	WR9643
LINCOLN RPGOP	LINCOLN, IL	PUP	ILX	WR9436
LOUISVILLE RPGOP	LOUISVILLE, KY	PUP	LMK	WR9423
MARQUETTE RPGOP	NEGAUNEE, MI	PUP	MQT	WR9743
MILWAUKEE RPGOP	DOUSMAN, WI	PUP	MKX	WR9965
MINNEAPOLIS RFC	CHANHASSEN, MN	PUP	MSR	WR9955
MINNEAPOLIS RPGOP	CHANHASSEN, MN	PUP	MPX	WR9658

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
NCL MICHIGAN RPGOP	GAYLORD, MI	PUP	APX	WR9610
NORTH PLATTE RPGOP	NORTH PLATTE, NE	PUP	LBF	WR9562
NORTHERN INDIANA RPGOP	NORTH WEBSTER, IN	PUP	IWX	WR9534
OMAHA RPGOP	VALLEY, NE	PUP	OAX	WR9553
PADUCAH RPGOP	PADUCAH, KY	PUP	PAH	WR9957
PLEASANT HILL RPGOP	PLEASANT HILL, MO	PUP	EAX	WR9446
PUEBLO RPGOP	PUEBLO, CO	PUP	PUB	WR9464
QUAD CITIES RPGOP	DAVENPORT, IA	PUP	DVN	WR9544
RAPID CITY RPGOP	RAPID CITY, SD	PUP	UNR	WR9662
RIVERTON/LANDER RPGOP	RIVERTON, WY	PUP	RIW	WR9576
SIOUX FALLS RPGOP	SIOUX FALLS, SD	PUP	FSD	WR9651
SPRINGFIELD RPGOP	SPRINGFIELD, MO	PUP	SGF	WR9440
ST LOUIS RPGOP	WELDON SPRING, MO	PUP	LSX	WR9971
TOPEKA RPGOP	TOPEKA, KS	PUP	TOP	WR9456
WICHITA RPGOP	WICHITA, KS	PUP	ICT	WR9450
Western Region				
BILLINGS RPGOP	BILLINGS, MT	PUP	BYZ	WT9677
BOISE RPGOP	BOISE, ID	PUP	BOI	WT9681

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
CEDAR CITY RPGOP	SALT LAKE CITY, UT	PUP	SLC	WT9932
ELKO RPGOP	ELKO, NV	PUP	LKN	WT9903
EUREKA RPGOP (BUNKER HILL)	EUREKA, CA	PUP	EKA	WT9594
FLAGSTAFF RPGOP	BELLEMONT, AZ	PUP	FGZ	WT9375
FLAGSTAFF SUP1	BELLEMONT, AZ	PUP	FGZ	WT9375
GLASGOW RPGOP	GLASGOW, MT	PUP	GGW	WT9768
GREAT FALLS RPGOP	GREAT FALLS, MT	PUP	TFX	WT9950
LAS VEGAS RPGOP	LAS VEGAS, NV	PUP	VEF	WT9386
LAS VEGAS SUP1	LAS VEGAS, NV	PUP	VEF	WT9386
LOS ANGELES SUP1	OXNARD, CA	PUP	LOX	WT9295
LOS ANGELES RPGOP	OXNARD, CA	PUP	LOX	WT9295
MEDFORD RPGOP	MEDFORD, OR	PUP	MFR	WT9597
MISSOULA RPGOP	MISSOULA, MT	PUP	MSO	WT9773
PENDLETON RPGOP	PENDLETON, OR	PUP	PDT	WT9688
PHOENIX RPGOP	PHOENIX, AZ	PUP	PSR	WT9278
POCATELLO RPGOP	POCATELLO, ID	PUP	PIH	WT9578
PORTLAND, OR RFC	PORTLAND, OR	PUP	PTR	WT9934
PORTLAND, OR RPGOP	PORTLAND, OR	PUP	PQR	WT9698
RENO RPGOP	RENO, NV	PUP	REV	WT9488

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
SACRAMENTO RFC	SACRAMENTO, CA	PUP	RSA	WT9915
SACRAMENTO RPGOP	SACRAMENTO, CA	PUP	STO	WT9914
SACRAMENTO SUP1	SACRAMENTO, CA	PUP	STO	WT9914
SALT LAKE CITY RPGOP	SALT LAKE CITY, UT	PUP	SLC	WT9932
SAN DIEGO RPGOP	SAN DIEGO, CA	PUP	SGX	WT9918
SAN FRANCISCO RPGOP	MONTEREY, CA	PUP	MTR	WT9933
SAN JOAQUIN VALY RPGOP	HANFORD, CA	PUP	HNX	WT9389
SANTA ANA MTS CA RPGOP	SAN DIEGO, CA	PUP	SGX	WT9918
SEATTLE RPGOP	SEATTLE, WA	PUP	SEW	WT9922
SPOKANE RPGOP	SPOKANE, WA	PUP	OTX	WT9785
TUCSON RPGOP	TUCSON, AZ	PUP	TWC	WT9274
YUMA AZ RPGOP (PHOENIX)	PHOENIX, AZ	PUP	PSR	WT9278
Alaskan Region				
ANCHORAGE	ANCHORAGE, AK	PUP	AFC	WV9904
ANCHORAGE RFC	ANCHORAGE, AK	PUP	ACR	WV9905
FAIRBANKS	FAIRBANKS, AK	PUP	AFG	WV9261
JUNEAU	JUNEAU, AK	PUP	AJK	WV9381
NWS ALASKAN REGION HQ	ANCHORAGE, AK	PUP	VRH	WV4100

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
	Pacific Region			
AGANA	AGANA, GU	PUP	GUM	WW9902
HONOLULU #2	HONOLULU, HI	PUP	HFO	WW9182
HONOLULU #3	HONOLULU, HI	PUP	HFO	WW9182
	Miscellaneous			
NRC #1 RPGOP	KANSAS CITY, MO	PUP	NRCM7	WG9163
NRC #2 RPGOP	KANSAS CITY, MO	PUP	NRCM7	WG9163
NRC #2 SUP	KANSAS CITY, MO	PUP	NRCM7	WG9163
NSSL	NORMAN, OK	PUP	OST02	MGG000
NWS HEADQUARTERS	SILVER SPRING, MD	PUP	SLVM2	WG9310
NWS HQ TEST BED (PUP)	SILVER SPRING, MD	PUP	SLVM2	WG9310
OSF ADS	NORMAN, OK	PUP		WG9410
OSF REDUNDANT RPGOP	NORMAN, OK	PUP	CRIO2	WG9410
OSF SDS	NORMAN, OK	PUP		WG9410
OSF SSS	NORMAN, OK	PUP		WG9410
OSF-1 PUP #1	NORMAN, OK	PUP	OSFO2	WG9410

PUP DISPOSAL PLAN

ATTACHMENT 2 (Continued)

EFFECTIVITY

NEXRAD Site Name	City, ST	EQP	SID	ORG Code
OSF-1 PUP #2 (HOTLINE)	NORMAN, OK	PUP	OSFO2	WG9410
OSF-2 #03 PUP (ENGINEERING LAB)	NORMAN, OK	PUP	OSF	WG9410
OSF-2 #10 PUP	NORMAN, OK	PUP	OSTO2	WG9410
OSF-2 #11 PUP	NORMAN, OK	PUP	OSTO2	WG9410
STORM PREDICTION CENTER NORMAN	NORMAN, OK	PUP		
TRAINING CENTER #1 RPGOP	KANSAS CITY, MO	PUP	TTCM7	WB9612
TRAINING CENTER #2 RPGOP	KANSAS CITY, MO	PUP	TTCM7	WB9612
TRAINING CENTER SUP	KANSAS CITY, MO	PUP	TTCM7	WB9612
TROPICAL PREDICTION CTR #1	MIAMI, FL	PUP	NHC	WX8000
TROPICAL PREDICTION CTR #2	MIAMI, FL	PUP	NHC	WX8000
TROPICAL PREDICTION CTR SUP1	MIAMI, FL	PUP	NHC	WX8000

ENGINEERING MANAGEMENT REPORTING SYSTEM
MAINTENANCE RECORD

Document Number
G 49978

General Information	1. Open Date	Time	2. Initials	3. Response Priority (check one)	4. Close Date	Time
	09 / 23 / 01	0900	DKR	○ Immediate ○ Low ○ Routine ☒ Not Applicable	09 / 23 / 01	1700

5. Description
DISPOSAL OF PUP

Equipment Information	6. Station ID	7. Equipment Code	8. Serial Number	9. TM	10. AT	11. How Mal.
	LIX	PUP	AA312381	E	B	999

12. *EQUIPMENT OPERATIONAL STATUS TIMES*	a. Fully Operational	b. Logistics Delay	Partly Operational	c. All Other	d. Logistics Delay	Not Operational	e. All Other

13. *Parts Failure Information*

Block #	a. ASN	b. NSN	c. TM	d. AT	e. How Mal.	f. Qty.	g. Maint. Hrs.
1	NONE						
2							
3							
4							
5							

14. *Work Load Information*

Type	Staff Hrs.
a. Routine	
b. Non-routine	
c. Travel	
d. Misc.	8:00
e. Overtime	

Miscellaneous Information	15. Maintenance Comments	16. Initials
	DISPOSED AND DEACTIVATED PUP	DKR

17. *SPECIAL PURPOSE REPORTING*	a. Mod. No.	b. Mod./Act./Deact.Date	c.	d.	e.
		09/23/01			

18. *CONFIGURATION MGMT. REPORTING* *(use as directed)*	ASN	Vendor Part Number (New Part)	Serial Number (Old Part)	Serial Number (New Part)

Sample

ATTACHMENT 3